



PICO N97 FANLESS IPC

- Intel® Processor N97
- Embedded LPDDR5-4800 8GB RAM (On request 16GB) + eMMC 64GB
- 12~24V, DC-IN w/220VAC Power Adapter
- 3x 2.5 Gigabit Ethernet LAN + 2x USB3.2 G2 + HDMI
- 1x COM RS232/485 w/ 2.5KV isolation protection
- -20°C to +70°C – w/Air Flow
- DIN Rail, Book or Wall Mount option



MAINBOARD

CPU: Intel Processor N97
4 Core / 4 Thread
1.6 GHz (Base) / 3.6GHz (Turbo), 12W

MEMORY

Capacity: 8GB (On Request 16GB)
Frequency: 4800 MHz
Type: Embedded LPDDR5

STORAGE

eMMC: 1x eMMC 64GB

I/O INTERFACE

COM: 1x RS232/485 w/ 2.5KV isolation protection
USB ports: 2x USB 3.2 G2

VIDEO

GPU: Intel® UHD Graphics
Interface: 1x HDMI (Up to 4096x2160 @60Hz)

ETHERNET

LAN: 3x Intel I226-IT 2.5 Gigabit LAN

POWER

Power in: 12~24V, DC-in TB
Max Power : 25W max
Adapter: AC 90~240V to DC 24V @5A/60W (optional)

MECHANICAL

Material: High-quality aluminum
Dimensions: (W)66.5x(D)100x(H)130mm
Weight: <1.00 Kg
Mounting: DIN Rail, Book or Wall Mount option

ENVIRONMENT

Operating temp.: -20°C to +70°C - w/Air Flow
Storage temp.: -20°C to 80C
Humidity: 10% to 95% RH @40°C, non-condensing
EMC: CE, RoHS

*All product information may subject to change without prior notice.

*The rights of all brand names, product names and trademarks belong to their respective owners.


SARC ITALIA SRL

Strada Albareto, 503 - 41122 Modena - ITALY
Tel. +39 059 8751076 Fax. +39 059 8751025

Website: www.indatech.it

Email: info@indatech.it

Copyright © 2024 INDATECH. All rights reserved.

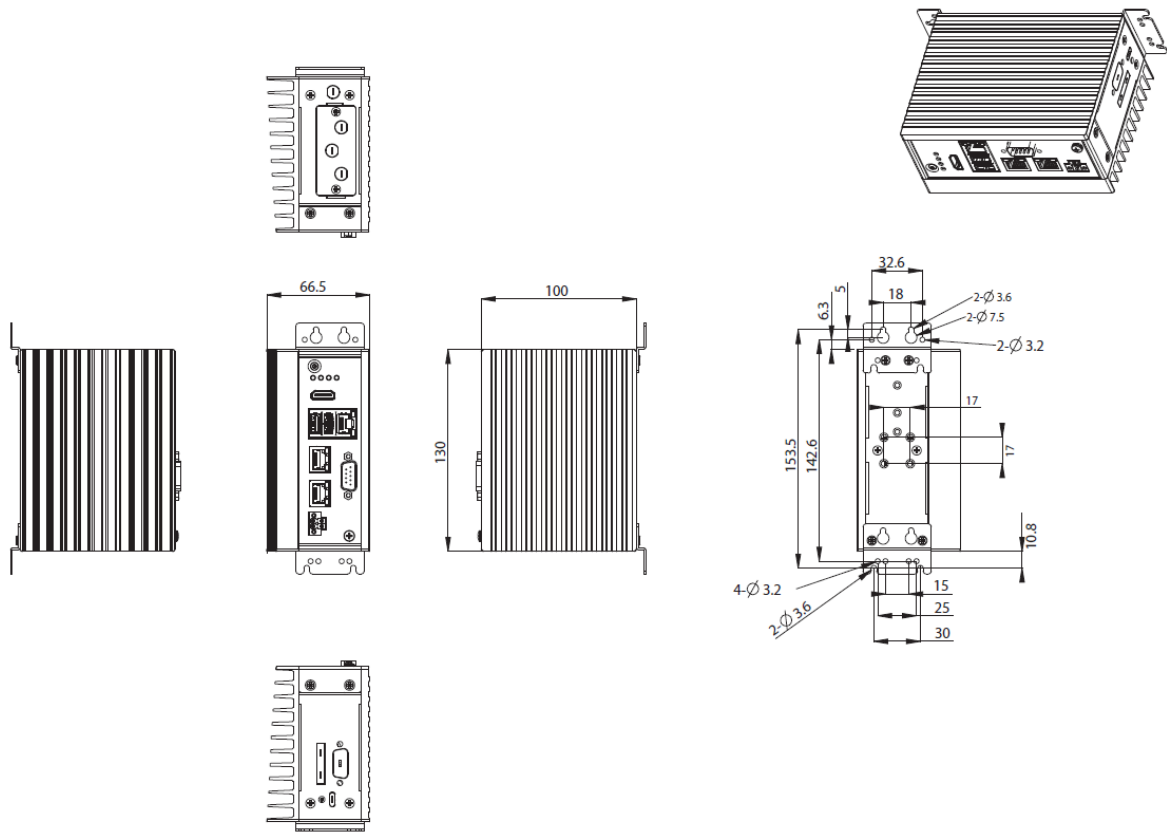

Accessories Included:

Compatible OS:

MS WINDOWS (64bit)

- Windows 10
- Windows 10 Enterprise LTSC (IoT)
- Windows 11
- Windows 11 Enterprise LTSC (IoT)



LINUX *

- CentOS 8
- Debian 12
- Fedora 34
- Ubuntu 24.04 LTS
- pfSense 2.7.2



** Linux distributions tested with the IPC.*

Order Code:

B04 - 32C - PICO - N97 - R08 - eMMC064

*All product information may subject to change without prior notice.

*The rights of all brand names, product names and trademarks belong to their respective owners.