

- 17" Industrial **MetalCase Monitor (4:3)**
- Resolution:  
**SXGA (1280x1024)**
- **Touch** or **w/o -Touch** version  
with USB or RS232 driver interface connection
- Two Power options available:  
**18 ~ 36V, VDC** or **80 ~ 265V, VAC**
- **VESA 100x100 + 200x100**

**IMC-170X**  
Made in ITALY



## DISPLAY

<b>Size:</b>	17"
<b>Resolution:</b>	SXGA (1280x1024)
<b>Aspect Ratio:</b>	4:3
<b>Backlight:</b>	Led
<b>Bright and Contrast:</b>	250 cd/mq 1000:1
<b>Colors:</b>	16 M
<b>View Angle:</b>	170° - 160°

## FRONT PANEL

<b>Thickness:</b>	6 mm
<b>Graphic:</b>	Black painted steel
<b>Front Panel Type:</b>	MetalCase

## TOUCH SCREEN

(Only with Touch Version)

<b>Glass Thickness:</b>	3 mm
<b>Technology:</b>	Resistive 5 wires
<b>Connection Type:</b>	USB 2.0 or RS232

## I/O INTERFACE

<b>Video Input:</b>	1x DVI-I 1x VGA (D_SUB 15pin)
<b>USB ports:</b>	1x USB 2.0 or RS232 for Touch Driver (Only with Touch Version)

## POWER


<b>Power in:</b>	18 ~ 36V, VDC Version 80 ~ 265V, VAC Version
<b>MAX Power :</b>	15W max

## MECHANICAL

<b>Material:</b>	Steel
<b>IP Protection:</b>	IP40
<b>Dimensions:</b>	(W)393x(D)326x(H)72mm
<b>Weight:</b>	5 Kg
<b>Mounting:</b>	VESA 100x100 + 200x100

## ENVIRONMENT

<b>Operating temp.:</b>	0°C ~ 50°C
<b>Storage temp.:</b>	-20°C ~ 70°C
<b>Humidity:</b>	40% ~ 60% Humidity, non-condensing
<b>EMC:</b>	CE, FCC, RoHS, LVD

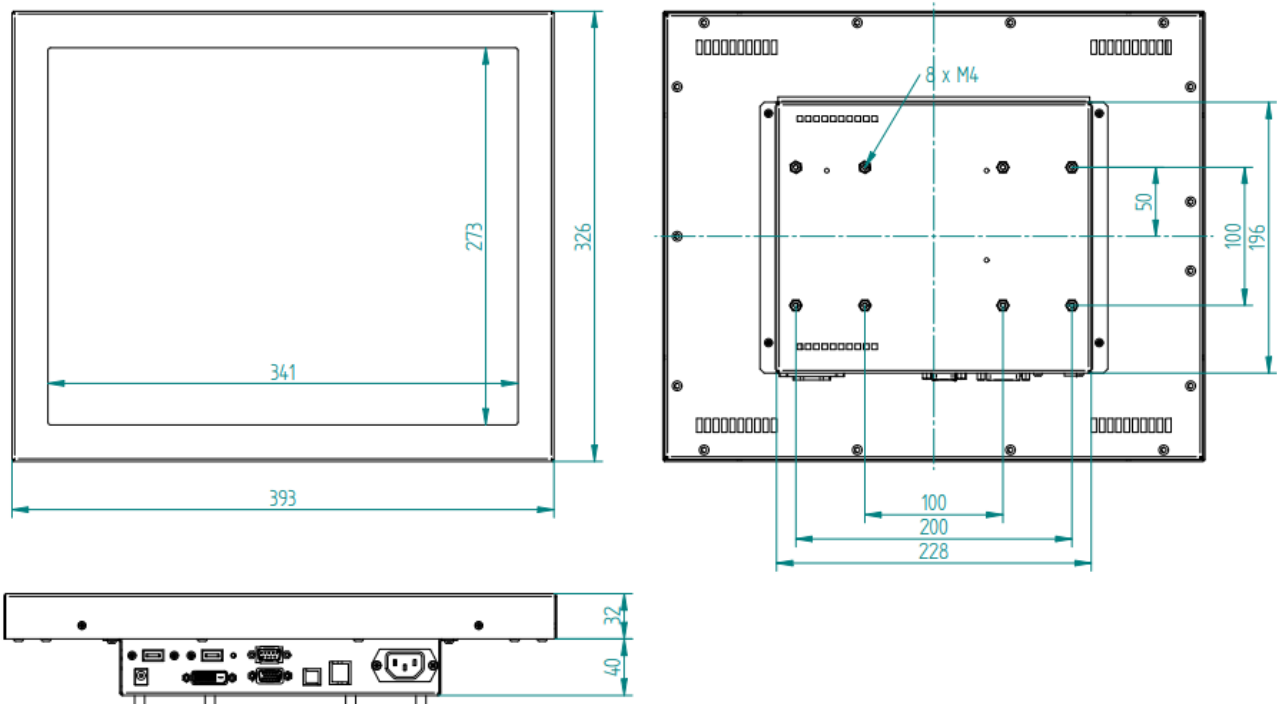

#### Accessories Included:

- 1x Power Cable
- 1x VGA Cable + 1x DVI-I Cable
- 1x USB 2.0 Cable

#### ORDER CODE:

Contact your sales representative for configuration.